


Flying Probe G50

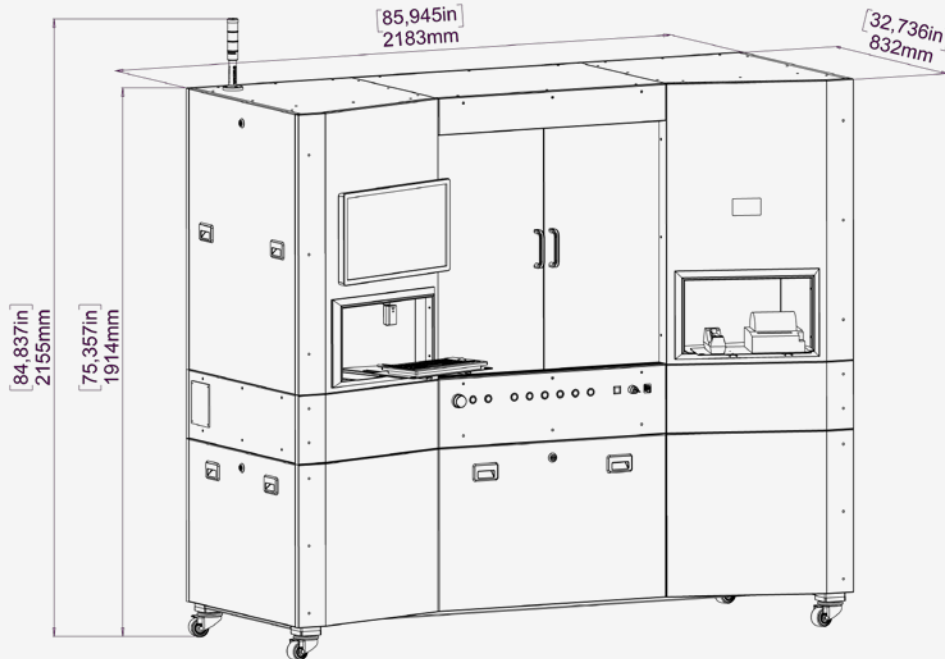

- Premium double sided Flying Probe system
- Multi Image Test
- Testing voltage up to 1000 Volt
- **Max test size 24,4" x 20,5" / 620 mm x 520 mm**
- High speed belt driven motion system mounted on a steel frame
- Front and rear fully automatic camera alignment system
- Electrical stretch frame – no compressed air connection required
- Quick frame for fast set up of rigid boards
- User friendly, high-speed software made specifically by Gardien
- Plug and Play link with the Gardien AC8
- CE Certificated

PLEASE CONTACT US FOR MORE INFORMATION:

Canada
info.ca@gardien.com
 +1 (416) 292 0726

China
Info.cn@gardien.com
 +86 512 5770 7951

Germany
Info.ge@gardien.com
 +49 6431 929730

Japan
info.jp@gardien.com
 +81 3 3904 6230

Taiwan
Info.tw@gardien.com
 +886 3355 1668

USA
Info.us@gardien.com
 +1 (503) 430 8980

Group
Info.group@gardien.com
 +65 6593 6380

G50 Specification

MECHANICS

No. of test probes	4 (2 front / 2 back) High Speed Z-Axis with soft touch (requires soft touch probes)	
Test probe pressure	2-10 g	
No. of CCD-cameras	2 (1front/1back)- Fully automatic camera alignment for easy and fast compensation of board registration	
Max test area (x/y)	24.4" x 20.5"	620mm x 520mm
Min board size (x/y)	2" x 2"	50mm x 50mm
Max board thickness	320 mil	8mm
Min board thickness (standard)	5mil	0,12mm
Repeatable accuracy +/-	0.6mil	15µm
Resolution (x/y) +/-	0.6mil	15µm
Smallest testable pad size	4mill	100µm
Smallest testable distance/pitch	4mil	100µm
Board Loading option	Stretch/Quick Frame	

DIMENSIONS & ENVIRONMENTAL CONDITIONS

Width	86.6"	2200mm
Depth	38.5"	980mm
Height	76"	1914mm (without light)
Weight	84.8"	2155mm (with light)
Air humidity	2866lbs 1,300kg	
Room Temp.	45-65% not condensing	
Power supply	64° -90°F	18°-32°C
	230V, 50/60Hz, 1000W Single Phase	

ELECTRONICS

Test voltage	20V up to 1000V (adjustable)	
Test current	5mA up to 500mA (adjustable)	
Continuity test	1 Ω up to 5000 Ω (dependent on the current, smaller current = larger resistance)	
Isolation test	1 M Ω up to 500 M Ω	

OPTIONS

Hardware

- > Vacuum plate: Single Sided for Flex / Thin core/ Inner layer (min Board thickness 3mil/80µm)
- > Multi Board (Quick frame)

Features

- > Embedded resistor test
- > Embedded capacitor test
- > HiPot measurement (1000V)
- > Micro Short Detection

Software

- > Data preparation software (Certified Ucamco)
- > Verification software (Certified Ucamco)
- > Test floor integration (TFI) capability

SOFTWARE

Operating Software	Windows 10 (English Version)
User Interface	Gardien FPX with multi Language support (Chinese, Japanese, Spanish,)
Data Input formats	MNF1, MNF2, IPC 356A/B, EMMA
Test Floor Integration	IT based communication and data exchange between Universal Grid, Flying Probe and Verification SW